


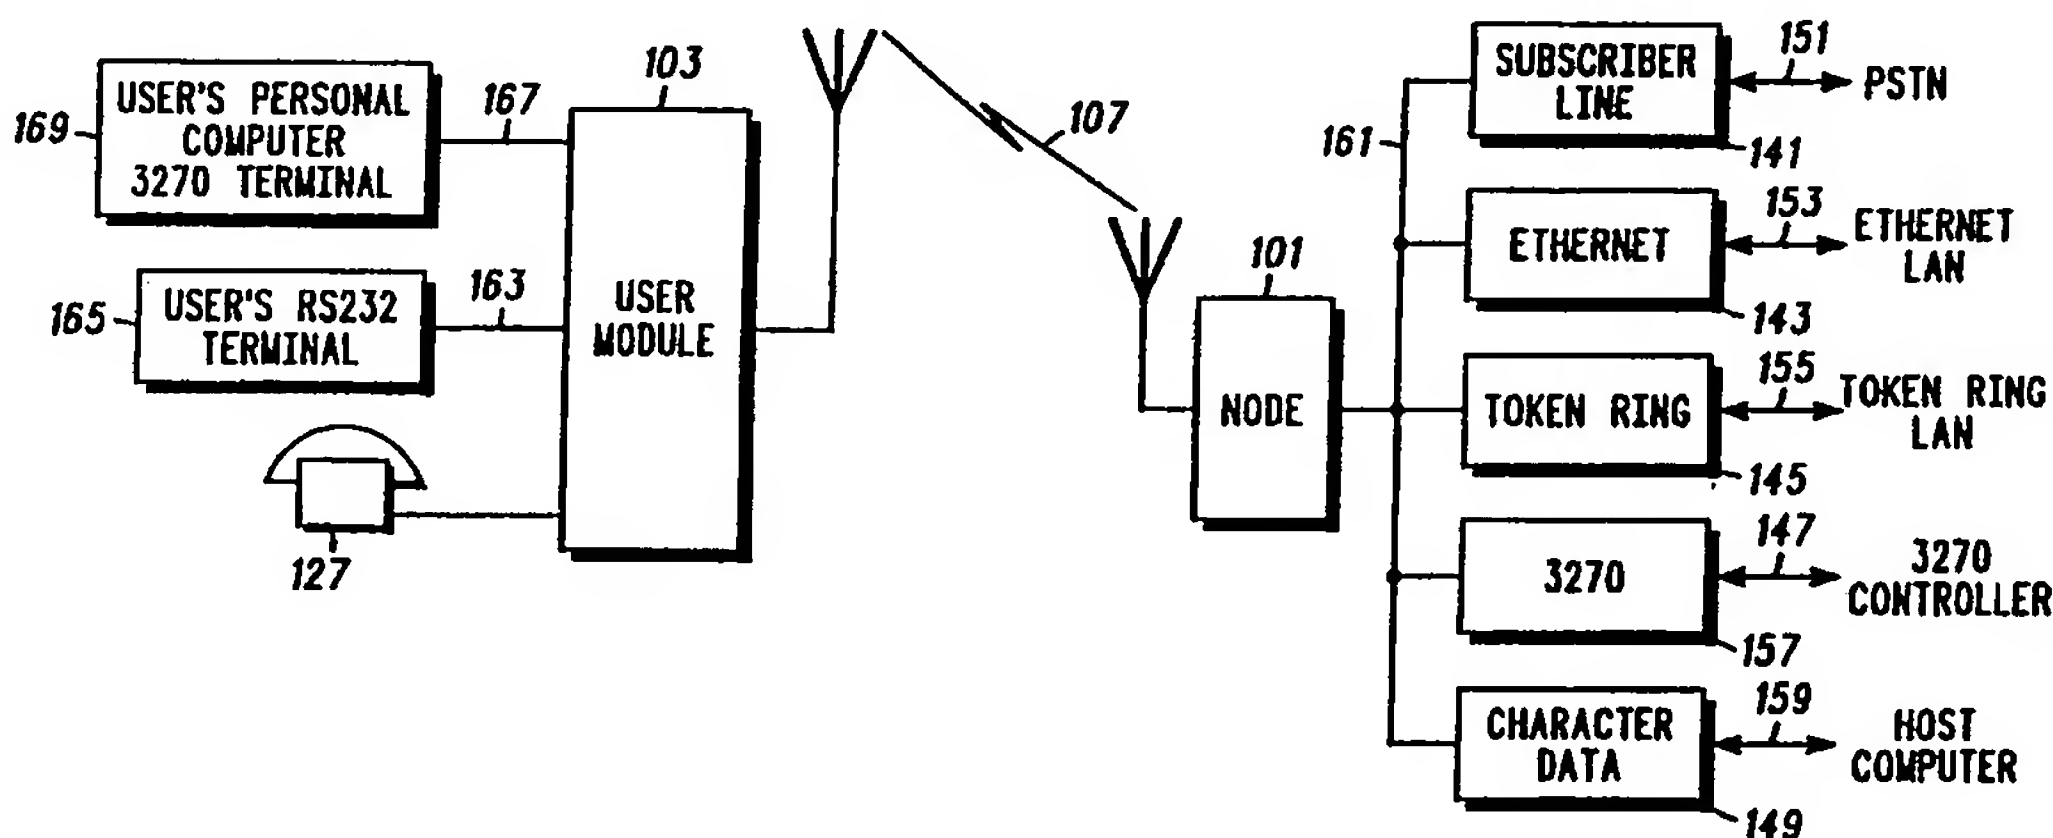

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04J 3/24, H04B 1/00	A1	(11) International Publication Number: WO 91/08629 (43) International Publication Date: 13 June 1991 (13.06.91)
(21) International Application Number: PCT/US90/06905 (22) International Filing Date: 27 November 1990 (27.11.90) (30) Priority data: 442,886 29 November 1989 (29.11.89) US (71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: BERKEN, James, J. ; 337 W. Greenfield Avenue, Lombard, IL 60148 (US). FREEBURG, Thomas, A. ; 416 N. Belmont Avenue, Arlington Heights, IL 60004 (US). OGASAWARA, Roy, T. ; 4430 N. Major Avenue, Chicago, IL 60630 (US). WHITE, Richard, E. ; 980 Milford Street, Cary, IL 60013 (US). MITZLAFF, James, E. ; 1727 N. Chestnut Avenue, Arlington Heights, IL 60004 (US). BEDLEK, Gregory, J. ; 510A Woodview Road, Barrington, IL 60010 (US).		(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i>

(54) Title: WIRELESS IN-BUILDING TELECOMMUNICATIONS SYSTEM FOR VOICE AND DATA COMMUNICATIONS

**(57) Abstract**

A wireless in-building telecommunications system for voice and data communications is disclosed having at least one node (101) arranged for linking to the PSTN (151) and at least one digital information source (153, 155, 157, 159) multiplicity of user modules (103) (UM's) linked to the node via a shared RF communications path (107). Each UM is coupled to a voice telephone instrument (127) and to one or more data terminals (165). The UM's communicate with the node by exchanging fast packets via the common RF path (107). The node also includes a fast-packet-switched mechanism controlled by a bandwidth allocating scheme to prevent collisions of packets as they are transmitted between the various units (101, 103) (nodes and/or user modules) that may be accessing the RF path (107). Also disclosed is a method for allocating the required bandwidth to each of the users of the common communications path in a wireless in-building telephone system. The invention provides for the combination of both voice and data in a single switch using a common packet structure. It allows for the dynamic allocation of bandwidth based on system loading. This includes not only bandwidth within the voice or data areas of the frame, but also between the voice and data portions. It also synchronizes the transfer of the data and the allocation of bus bandwidth.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	ML	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CI	Côte d'Ivoire	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

- 1 -

5 **WIRELESS IN-BUILDING TELECOMMUNICATIONS SYSTEM
FOR VOICE AND DATA COMMUNICATIONS**

10 Technical Field

 This invention pertains to voice/data packet switches and, more particularly, to a wireless in-building telecommunications system for voice and data communications.

15

Background of the Invention

 Certain wireless communications systems have been known in the prior art. Voice and data switches are known in the prior art. Packet
20 switching is also known. In the past, however, synchronization for the control of the devices sending and receiving information packets in a voice/data packet switch has been a problem. This problem has been related to the problem of dynamically allocating the packet bandwidth between the various peripheral devices attached to the switch for voice
25 information and data information. Another related factor has been the architecture for the wireless switch. The architectures of past wireless switches had a problem of dynamically allocating bandwidth, thus resulting in the switch having a low switching capacity and throughput. In PBX's, it is because all data is switched byte-by-byte. In data packet
30 switches, it is a processor horsepower issue. These performance problems become even more significant in the context of modern fast packet protocols. It would be desirable, therefore, to provide a wireless voice/data packet switch with an improved architecture.

- 2 -

Key to this wireless packet switch architecture is a method for allocating the required bandwidth to each of the users of the common communications path. Previous systems did not allocate the bandwidth on a need basis, but rather allocated the bandwidth at system start-up without allowance for dynamic changes in response to changing traffic needs.

For example, see Hewitt et al., U. S. Patent 4,642,806, issued 2/10/87, entitled "Communications Network having a Single Node and a Plurality of Outstations".

See, also, Eizenhoefer, U. S. Patent 4,754,453, issued 6/28/88, entitled "Digital Radio Transmission System with a Connection-Accompanying Organization Channel in the Time-Division Multiplex Frame".

See, also, Allan et al., U. S. Patent 4,759,017, issued 7/19/88, entitled "Telecommunications Exchange Allocating Variable Channel Bandwidth".

See, also, Calvignac et al., U. S. Patent 4,763,321, issued 8/9/88, entitled "Dynamic Bandwidth Allocation Mechanism Between Circuit Slots and Packet Bit Stream in a Communication Network".

Summary of the Invention

It is an object of the present invention, therefore, to provide a wireless in-building telephone system for voice and data communications. It is a further object of the present invention to provide a method for allocating the required bandwidth to each of the users of the common communications path in such a communication system.

Accordingly, a wireless in-building telecommunications system for voice and data communications is disclosed having at least one node arranged for coupling to the public switched telephone network (PSTN) for voice and to a host computer and/or a local area (LAN) for data and a multiplicity of user modules (UM's) linked to the node via a shared RF communications path. According to the invention, the UM's communicate

- 3 -

with the node by exchanging fast packets via the common RF path. Also, the node includes a fast-packet-switched mechanism controlled by a bandwidth-allocating scheme to prevent collisions of packets as they are transmitted between the various units (nodes and/or user modules) that
5 may be accessing the RF path.

Also disclosed is a method for a wireless in-building telecommunications system for voice and data communications, according to the invention, for allocating the required bandwidth to each of the users of the common communications path in a wireless fast
10 packet communications system.

A wireless in-building telecommunications system for voice and data communications, according to the invention, provides for the combination of both voice and data in a single switch using a common packet structure. It allows for the dynamic allocation of bandwidth based
15 on system loading. This includes not only bandwidth within the voice or data areas of the frame, but also between the voice and data portions. It also synchronizes the transfer of the data and the allocation of bus bandwidth.

20

Brief Description of the Drawings

Figs. 1A - 1E form a system block diagram of the node and user module that depicts a first embodiment of a wireless in-building
25 telecommunications system for voice and data communications, according to the invention.

Fig. 2 shows a frame for the first embodiment.

Fig. 3 shows the time slot arrangement within the frame.

Fig. 4 shows the contents within a time slot.

30 Fig. 5 shows a typical network topology for the first embodiment.

- 4 -

Fig. 6 shows several bandwidth allocation schemes for the first embodiment.

5 Detailed Description of the Invention

Figs. 1A - 1E form a block diagram depicting a first embodiment of a wireless in-building telecommunications system for voice and data communications, according to the invention.

10 Referring now to Fig. 1A, there is shown a node 101 and a user module (UM) 103. It will be appreciated by those skilled in the art that a multiplicity of UM's may be used. However, for simplicity, only one is shown in Fig. 1A.

Fig. 1B depicts the node 101 in greater detail.

15 Fig. 1C depicts the user module 103 in greater detail.

Returning now to Fig. 1A, it is seen the node 101 is connected to a multiplicity of interface units 141, 143, 145, 147, and 149 via fiber optic link 161. The interface unit 141 is a subscriber line interface unit arranged to couple to the PSTN 151. The interface unit 143 is an
20 Ethernet interface unit arranged to couple to an Ethernet LAN 153. The interface unit 145 is a Token Ring interface unit arranged to couple to a Token Ring LAN 155. The interface unit 147 is a 3270 interface unit arranged to couple to a 3270 controller 157. The interface unit 149 is a character data interface unit arranged to couple to a host computer 159.

25 Fig. 1D depicts the subscriber line interface unit 141 in greater detail.

Fig. 1E depicts the Ethernet/Token Ring/3270/Character Data interface units 143, 145, 147, 149 in greater detail.

- 5 -

The following is a description of the processing of the voice signal from the PSTN 151 through the subscriber line interface unit, over the fiber 161 through the node 101, over the RF channel 107 through the user module 103 to the telephone 127.

5 Turning now to Fig. 1D, the voice input from the PSTN lines 151A, 151B is filtered, compressed, and digitized by the subscriber line interfaces 171, 173. The subscriber line interfaces 171, 173 form voice packets, which include voice samples and line status, that are sent to the packet switch 175 via the packet switch bus 177. The packet switch 175
10 will then place a modified voice packet on the packet switch bus 177 at the appropriate time to send the packet to the fiber interface 179 and therefore over the fiber 161.

 The software contained in the processor memory 183 is executed by the control processor 181 to control all the functions of the subscriber
15 line interface unit 141.

 The human interface 185 provides an indication of the status of the device.

 Turning now to Fig. 1B, the fiber interface 205 receives the voice packet from the fiber 161 at the appropriate time and sends it to the
20 packet switch 111 via the packet switch bus 113. The packet switch 111 will then place a modified voice packet on the packet switch bus 113 at the appropriate time to send the voice packet to the radio 115 and therefore over the RF channel 107.

 The software contained in the processor memory 121 is executed
25 by the control processor 135 to control all the functions of the node 101.

 The human interface 125 provides an indication of the status of the device.

 Turning now to Fig. 1C, the radio 211 receives the voice packet from the RF channel 107 at the appropriate time and sends it to the

- 6 -

packet switch 213 via the packet switch bus 207. The packet switch 213 will then place a modified voice packet on the packet switch bus 207 at the appropriate time to send the voice packet to the phone interface 209. The phone interface 209 will convert the packet from digital to analog,
5 expand and filter the signal and send it to the telephone 127.

The software contained in the processor memory 217 is executed by the control processor 215 to control all the functions of the user module 103.

10 The human interface 219 provides an indication of the status of the device.

The processing of the voice signal from the telephone 127 to the PSTN 151 occurs in much the same manner except in the opposite direction.

Returning now to Fig. 1C, the phone interface 209 filters,
15 compresses, and digitizes the voice input from the telephone 127. The phone interface 209 forms voice packets, which include voice samples and line status, that are sent to the packet switch 213 via the packet switch bus 207. The packet switch 213 will then place a modified voice packet on the packet switch bus 207 at the appropriate time to send the
20 packet to the radio 211 and therefore over the RF channel 107.

Now returning to Fig. 1B, the radio 115 receives the voice packet from the RF channel 107 at the appropriate time and sends it to the packet switch 111 via the packet switch bus 113. The packet switch 111 will then place a modified voice packet on the packet switch bus 113 at
25 the appropriate time to send the voice packet to the fiber interface 205 and therefore over the fiber 161.

Now returning to Fig. 1D, the fiber interface 179 receives the voices packet from the fiber 161 at the appropriate time and sends it to the packet switch 175 via the packet switch bus 177. The packet switch
30 175 will then place a modified voice packet on the packet switch bus 177

- 7 -

at the appropriate time to send the voice packet to the appropriate subscriber line interface 171,173. The subscriber line interface 171,173 will convert the packet from digital to analog, expand and filter the signal and send it to the PSTN line 151A, 151B.

5 Data is handled in much the same manner as voice. The following is a description of the processing of data through the system.

Turning now to Fig 1E, data is received from the Ethernet LAN 153, token ring LAN 155, 3270 controller 157 or the host computer 159 via the data interface 201. The data is sent to the control processor 195
10 via the processor bus 203. The control processor 195 will form packets and send them to the packet switch 193 via the processor bus 203. The packet switch 193 will then place the data packet on the packet switch bus 189 at the appropriated time to send the packet to the fiber interface 191 and therefore over the fiber 161.

15 The software contained in the processor memory 197 is executed by the control processor 195 to control all the functions of the Ethernet interface unit 143, token ring interface unit 145, 3270 interface unit 147, character data interface unit 149.

Returning to Fig, 1B, the fiber interface 205 receives the data
20 packet from the fiber 161 at the appropriate time and sends it to the packet switch 111 via the packet switch bus 113. The packet switch 111 will then place a modified data packet on the packet switch bus 113 at the appropriate time to send the data packet to the radio 115 and therefore over the RF channel 107.

25 Returning to Fig. 1C, the radio 211 receives the data packet from the RF channel 107 at the appropriate time and sends it to the packet switch 213 via the packet switch bus 207. The packet switch 213 will then send the data packet to the control processor 215 via the processor bus 225. The control processor will then send the data packet to the
30 appropriate interface, terminal interface 221 for character data or LAN/3270 interface 223 for Ethernet, token ring, and 3270. The terminal

- 8 -

interface 221 places the data on the terminal port 163 and therefore to the terminal 165. The LAN/3270 interface 223 places the data on the LAN port 167 and therefore to the personal computer/ 3270 terminal 169.

5 The processing of data from the user's terminal 165 , personal computer / 3270 terminal 169 to the appropriate data interface unit, 143, 145, 147, 149 is handled in the same manner except in the opposite direction.

10 Returning to Fig. 1C, the terminal interface 221 accepts data from the terminal 165 via the terminal port 163 or the LAN/3270 interface 223 accepts data from the user's personal computer / 3270 terminal 169 via the LAN port 167. The data is sent to the control processor 215 via the processor bus 225. The control processor 215 will form packets and send them to the packet switch 213 via the processor bus 225. The packet switch 213 will then place the data packet on the packet switch bus 207 at the appropriated time to send the packet to the radio 211 and therefore over the RF channel 107.

20 Returning to Fig. 1B, the radio 115 receives the data packet from the RF channel 107 at the appropriate time and sends it to the packet switch 111 via the packet switch bus 113. The packet switch 111 will then place a modified data packet on the packet switch bus 113 at the appropriate time to send the data packet to the fiber interface 205 and therefore over the fiber 161.

25 Returning to Fig. 1E, the fiber interface 191 receives the data packet from the fiber 161 at the appropriate time and sends it to the packet switch 193 via the packet switch bus 189. The packet switch 193 will then send the data packet to the control processor 195 via the processor bus 203. The control processor will then send the data packet to the data interface 201 via the processor bus 203. The data interface 201 places the data on the data port 153, 155, 157, or 159.

30 There will be a repetitive frame occurring periodically which contains system control, voice and data packets necessary for the correct

- 9 -

operation of the system. The frame shown in Fig. 2 is made up of a fixed number of time slots. Fig. 3 shows how the time slots are divided into two basic groups; node transmit and node receive. Each of these two groups is further divided into three subgroups; control time slots, voice time slots,
5 and data time slots.

Each time slot has the same basic format shown in Fig. 4. A time slot is divided into four parts: bus control, packet preamble, packet header, and packet information. The voice, data or system control is contained in the packet information portion.

10 This system allows for maximum spectral efficiency by allocating the required bandwidth to each of the users of the common communications path. As mentioned above, previous systems did not allocate the bandwidth on a need bases, but rather allocated the bandwidth at system start-up. As a result, this system takes advantage of
15 the fast packet switching technology that allows both circuit and non-circuit connections to be made in the same system.

The control time slots are used for system control and bandwidth allocation. When a user module or interface unit requires voice or data bandwidth, it will use a predetermined control time slot to request
20 bandwidth from the node. The node will allocate the bandwidth, if available, and notify the user module and interface unit of the bandwidth allocation via a predetermined control time slot. The user module and interface unit will use the bandwidth until it is no longer required. At that point, the user module and/or the interface unit will use a predetermined
25 control time slot to send a de-allocation request to the node. The node will use a predetermined control time slot to acknowledge the de-allocation of the bandwidth to the user module and interface unit.

Fig. 5 shows a typical network topology 500 for the first embodiment. There is shown a multiplicity (n) of nodes, N_1 through N_n .
30 There is also shown a multiplicity (n) of user modules UM_1 through UM_n . The nodes communicating with each other and with the user modules on a shared communications path via a fast-packet-switched mechanism,

- 10 -

the fast-packet-switched mechanism being controlled by a bandwidth allocation scheme preventing collision between the various units that may be accessing the common communications path.

- Fig. 6 illustrates multiple approaches 600 that can be used for dividing (or allocating) the bandwidth for the system. These include:
- Reusing bandwidth allocation (601);
 - Time slot assignment (603) and reuse of time slots (605);
 - Carrier frequency assignment (607) and reuse of carrier frequencies (609);
 - Spread spectrum coding assignments (611) and reuse of spread spectrum codings (613).

Reuse bandwidth allocation is described as follows:

As more bandwidth is required, the system can simply be replicated with sufficient separation so as not to interfere with another system.

Time slot assignment bandwidth allocation is described as follows:

In a fast packet communication system, the communications channel is divided into frames. Each of these frames is a given length in time. Each frame is broken into time slots. Each of these time slots contains a packet of information. This is shown in Fig. 2. All time slots are available for use by any node or module requesting bandwidth. This request can be for either voice or data information transfer.

Using a time division multiple access (TDMA) scheme, the frame is divided into sections (groups of time slots), one transmit and one receive for the nodes. The nodes use their allocated portion of the frame to communicate with user modules and other nodes. As a node's requirement for bandwidth changes, its portion of the frame will increase or decrease as required. This change of the frame (time slot) allocation requires coordination between all of the nodes.

When a request is made for voice information transfer, a time slot is allocated for the duration of the call -- this is known as a "circuit switched path". When a request is made for data information transfer, a

- 11 -

time slot is allocated for a single frame or group of frames -- this is known as a "packet switched path".

When a module requires bandwidth, a time slot or group of time slots is assigned to that module for its use. When the module no longer
5 requires the allocated bandwidth, the time slots are "freed-up" and are available for use by the next module requesting bandwidth.

Reuse of time slots allocation is described as follows:

In the system shown in Fig. 5, time slots can be reused if a pair of devices (module-node or node-node) are located so that they do not
10 interfere with another pair of devices using the same time slot in the same frame on the same communications channel.

Carrier frequency assignment bandwidth allocation is described as follows:

In the system shown in Fig. 5, as more bandwidth is required than
15 a single carrier frequency can provide, node(s) and/or module(s) can use another carrier frequency for communications. All carrier frequencies have the same basic frame structure.

Reuse of carrier frequencies is described as follows:

A carrier frequency can be reused if it does not interfere with
20 another group of node(s) or module(s) using the same carrier frequency.

Spread spectrum coding assignment bandwidth allocation is described as follows:

In the system shown in Fig. 5, as more bandwidth is required a
different code (for direct sequence systems) or hoping sequences (for
25 frequency hoping systems) can be used for communications between node(s) and/or module(s).

Reuse of spread spectrum codings is described as follows:

A code (for direct sequence systems) or hoping sequence (for
frequency hoping systems) can be reused if it does not interfere with
30 another group of node(s) - module(s) using the same code or hoping sequence.

- 12 -

While various embodiments of a wireless in-building telecommunications system for voice and data communications, according to the present invention, have been described hereinabove,
5 the scope of the invention is defined by the following claims.

- 13 -

What is claimed is:

Claims:

5

1. A wireless in-building telecommunications system for voice and data communications comprising:

at least one node;

at least one user module;

10

said at least one node having voice interface means for coupling voice signals to the public switched telephone network (PSTN), and at least one data interface means for coupling data signals to at least one digital information source;

15

said at least one user module having voice interface means for coupling voice signals to a telephone instrument means, and at least one data interface means for coupling data signals to at least one digital information terminal;

20

said at least one node communicating with said at least one user module via a shared RF communications path via a fast-packet switching mechanism, said mechanism being controlled by a bandwidth allocating scheme preventing collision between the various units (nodes and/or user modules) that may be accessing said common communication path.

- 14 -

2. A wireless in-building telecommunications system for voice and data communications comprising:

at least one node;

at least one user module;

5 said at least one node having at least one data interface means for coupling data signals to at least one digital information source;

said at least one user module having at least one data interface means for coupling data signals to at least one digital information terminal;

10 said at least one node communicating with said at least one user module via a shared RF communications path via a fast-packet switching mechanism, said mechanism being controlled by a bandwidth allocating scheme preventing collision between the various units (nodes and/or user modules) that may be accessing said common communication path.

15

3. A wireless in-building telecommunications system for voice and data communications comprising:

at least one node;

20 at least one user module;

said at least one node communicating with said at least one user module via a shared RF communications path via a fast-packet-switched mechanism, said mechanism being controlled by a bandwidth allocating scheme preventing collision between the various units (nodes and/or

25 user modules) that may be accessing said common communication path;

said at least one node having means for coupling to the public switched telephone network (PSTN).

- 15 -

4. A wireless in-building telecommunications system for voice and data communications comprising:
- at least one node;
 - at least one user module;
- 5 said at least one node having voice interface means for coupling voice signals to the PSTN, and at least one data interface means for coupling data signals to at least one digital information source such as, for instance, an Ethernet-type local area network (LAN), a Token Ring-type LAN, a 3270 controller, or a host computer;
- 10 said at least one user module having voice interface means for coupling voice signals to a telephone instrument means, and at least one data interface means for coupling data signals to at least one digital information terminal such as, for instance, a personal computer, a 3270-type terminal, or an RS232-type terminal;
- 15 at least one shared RF communications path coupling said user module and said node;
- 20 said at least one user module communicating with said PSTN by exchanging fast packets with said node, said node switching said fast packets via a fast-packet-switched mechanism, said mechanism being controlled by a bandwidth allocating scheme preventing collision between the various units (nodes and/or user modules) that may be accessing said common communication path.

- 16 -

5. In a wireless in-building telecommunications system for voice and data communications and having at least one node having voice interface means for coupling voice signals to the PSTN, and having at least one data interface means for coupling data signals to at least one digital information source, a plurality of user modules having voice interface means for coupling voice signals to a telephone instrument means and at least one data interface means for coupling data signals to at least one digital information terminal, and at least one shared RF communications path having a capacity, a method for said node supporting at least one voice and data communications session between at least one digital information terminal and at least one digital information source, comprising the steps of:
- (a) supporting at least one link to at least one digital information source, and supporting at least one link to the PSTN;
 - (b) exchanging fast packets with said user module via said at least one shared RF communications path;
 - (c) preventing collisions of said fast packets as they are exchanged with said user modules; and,
 - (d) switching said fast packets.
6. A wireless in-building telecommunications system for voice and data communications comprising:
- at least one node arranged for coupling to the PSTN;
 - at least one user module;
 - said at least one node communicating with said at least one user module via a shared RF communications path via a fast-packet-switched mechanism, said mechanism being controlled by a bandwidth allocating scheme preventing collision between the various units (nodes and/or user modules) that may be accessing said common communication path.

- 17 -

7. In a wireless in-building telecommunications system for voice and data communications and having at least one node having voice interface means for coupling voice signals to the PSTN and having at least one data interface means for coupling data signals to at least one digital information source, a plurality of user modules having voice interface means for coupling voice signals to a telephone instrument means and at least one data interface means for coupling data signals to at least one digital information terminal, and at least one shared RF communications path having a capacity, a method for dividing or allocating the bandwidth among said user modules, said method comprising the steps of:
- reusing said bandwidth;
 - assigning time slots and reusing said time slots;
 - assigning carrier frequencies and reusing said carrier frequencies;
- 15 and,
- assigning spread spectrum coding and reusing said spread spectrum coding.
- 20 8. A wireless in-building telecommunications system for voice and data communications and having at least one node having voice interface means for coupling voice signals to the PSTN and having at least one data interface means for coupling data signals to at least one digital information source and having allocating means for dividing or allocating the bandwidth, said allocating means comprising:
- bandwidth means for reusing said bandwidth;
 - time slot means for assigning time slots and reusing said time slots;
 - carrier frequency means for assigning carrier frequencies and reusing said carrier frequencies; and,
- 30 spread spectrum means for assigning spread spectrum coding and reusing said spread spectrum coding.

- 18 -

9. A wireless in-building telecommunications system for voice and data communications comprising:
- at least one node;
 - at least one user module;
 - 5 said at least one node having voice interface means for coupling voice signals to the public switched telephone network (PSTN), and at least one data interface means for coupling data signals to at least one digital information source;
 - said at least one user module having voice interface means for
 - 10 coupling voice signals to a telephone instrument means, and at least one data interface means for coupling data signals to at least one digital information terminal;
 - at least one shared RF communications path, each path having a capacity;
 - 15 said at least one node having:
 - fast-packet switching means for exchanging fast packets with said user modules via said at least one shared RF communications path;
 - allocating means for allocating the capacity of each RF communications path amongst said user modules; and,
 - 20 collision preventing means for preventing collision of the fast packets as they are exchanged between said user modules.



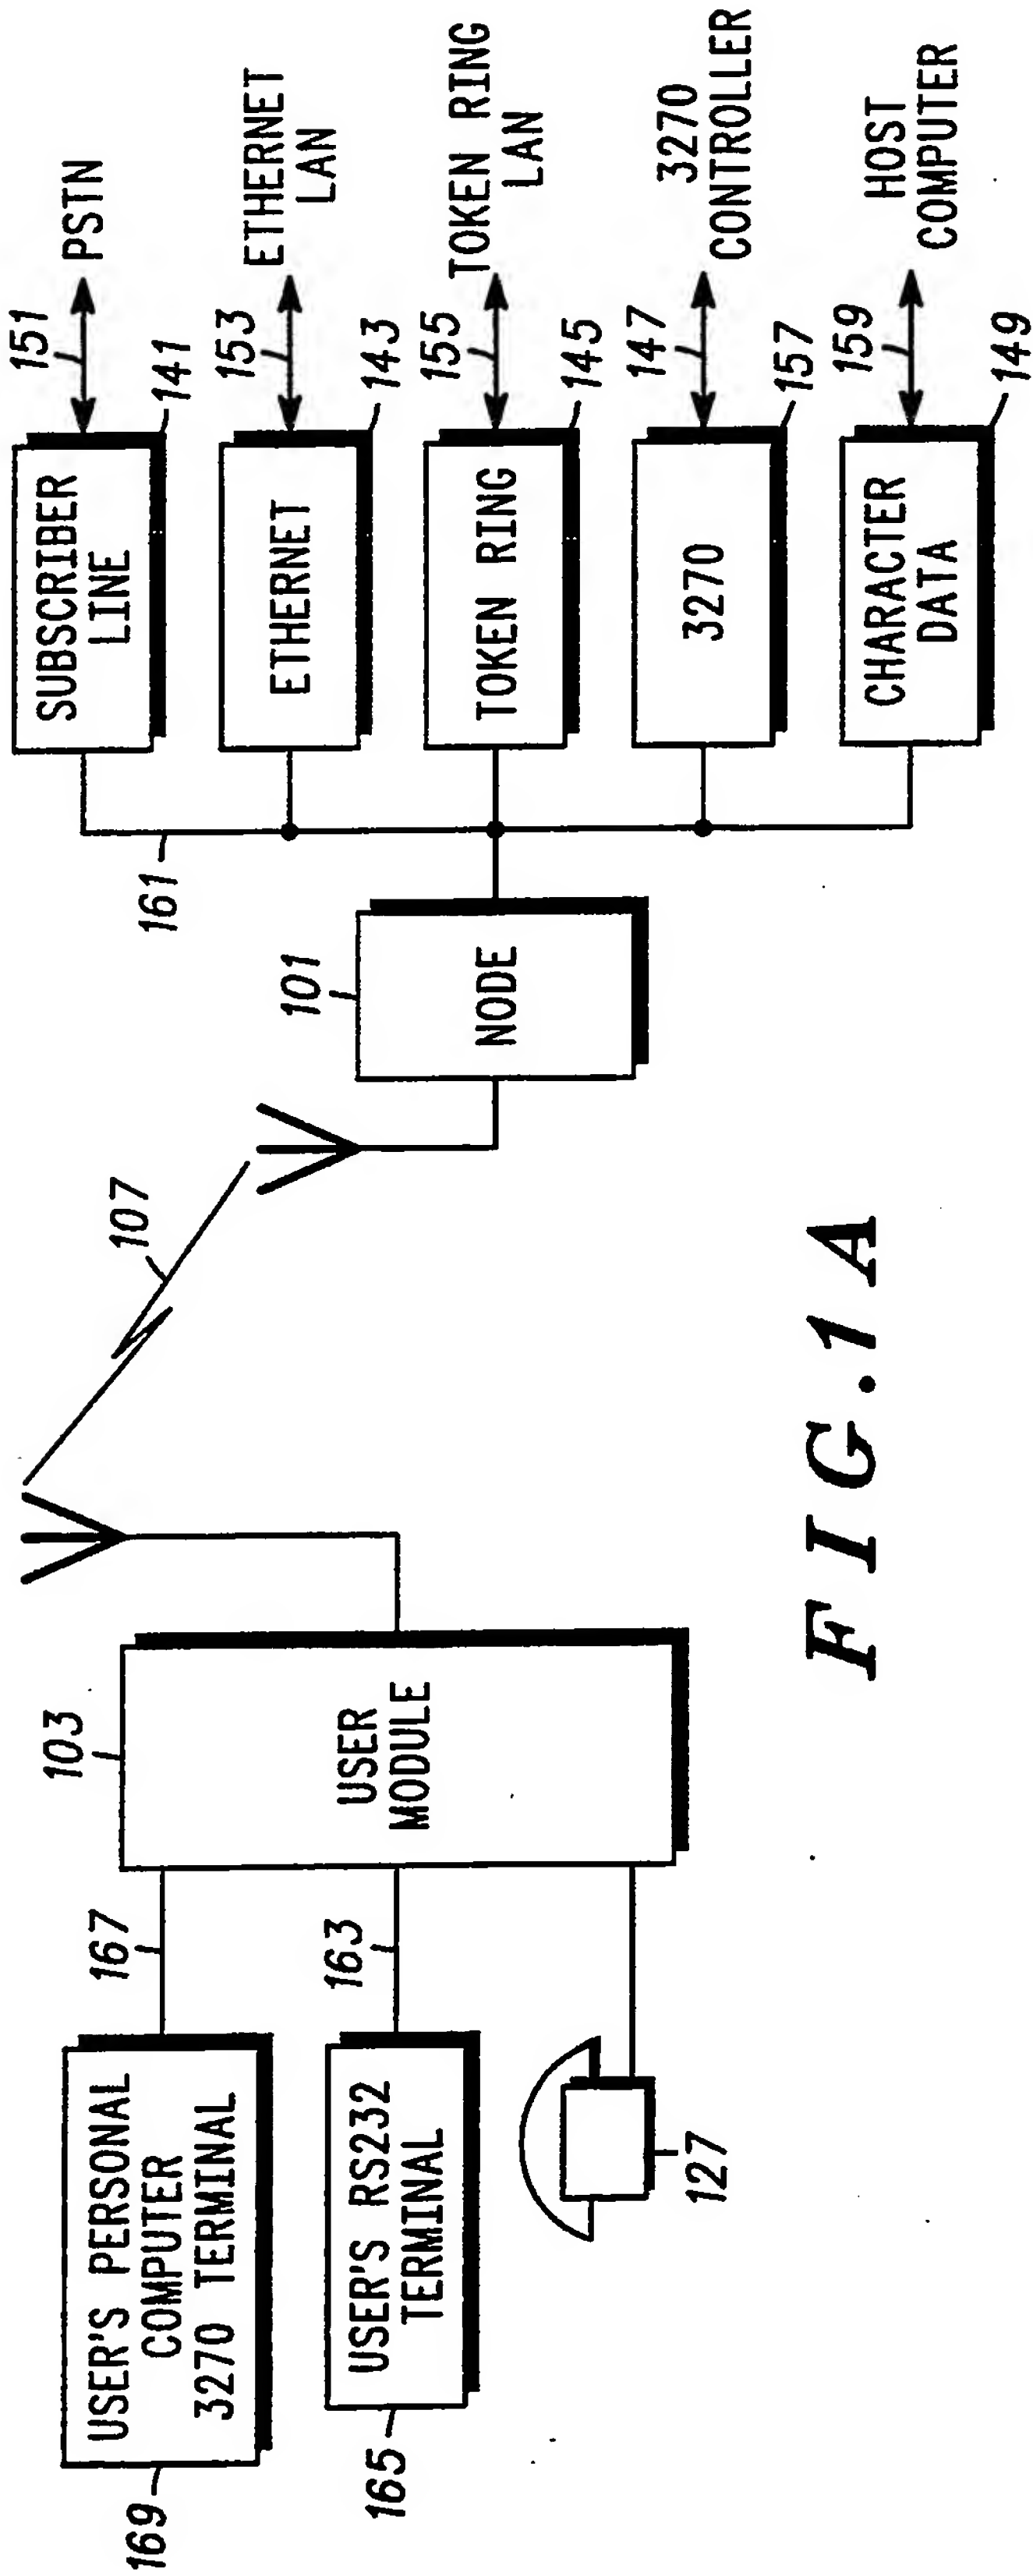


FIG. 1A

FIG. 2



200

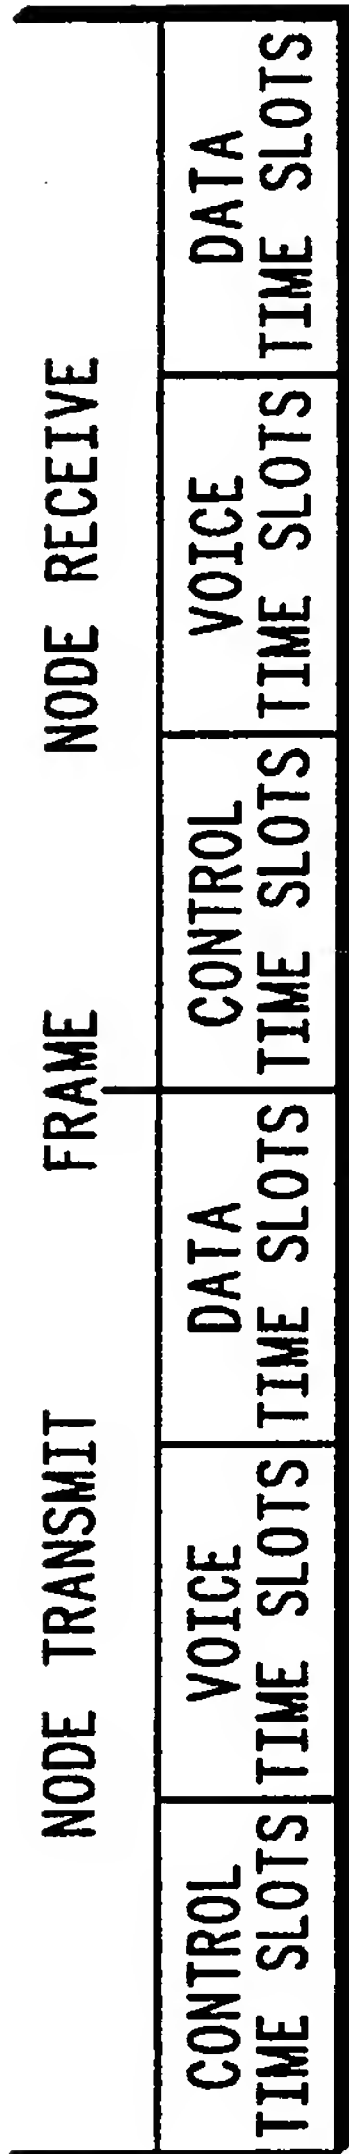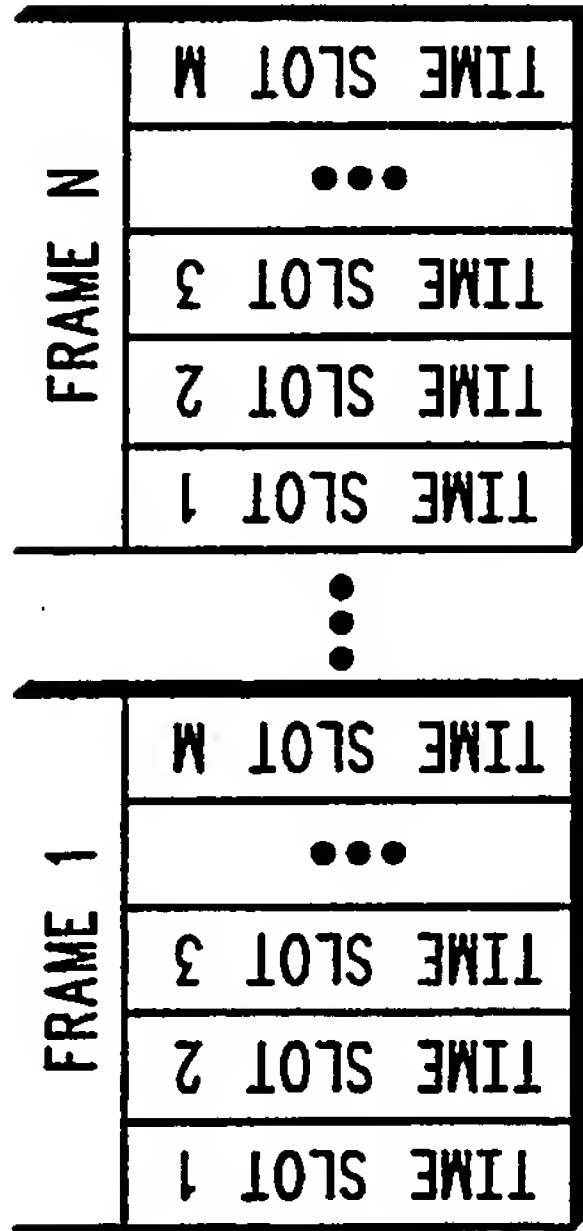

300

FIG. 3

2 / 4

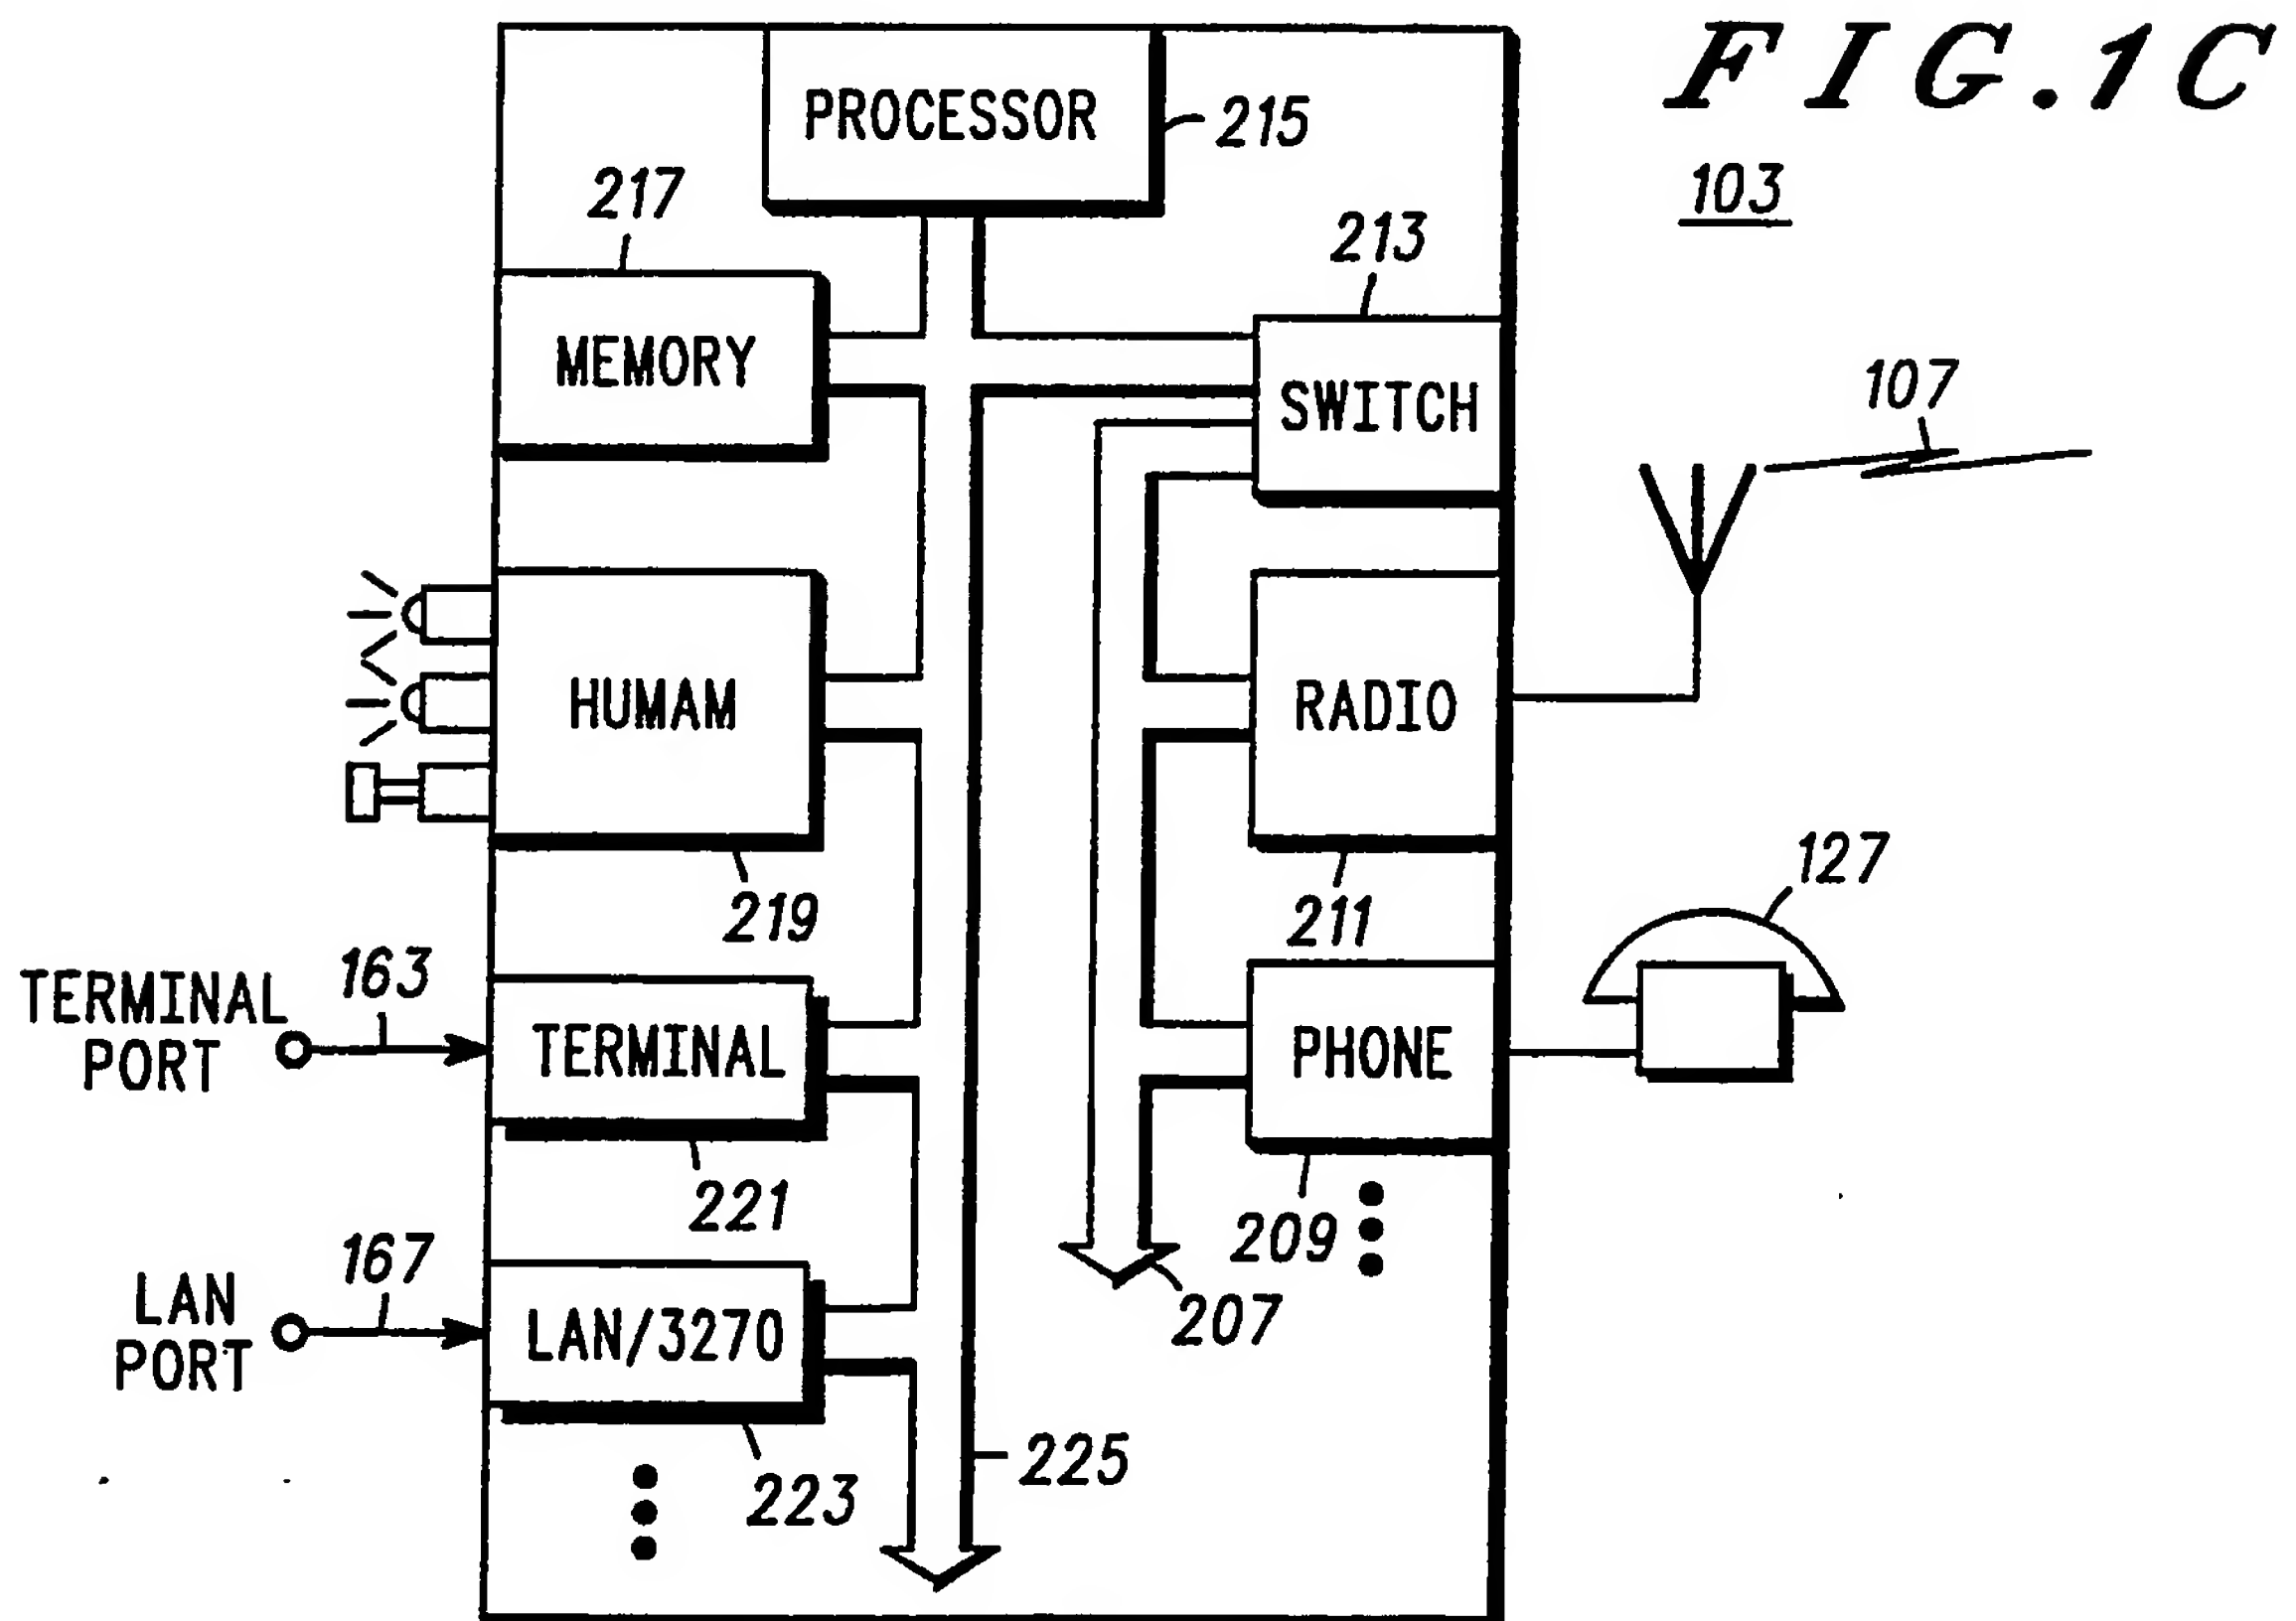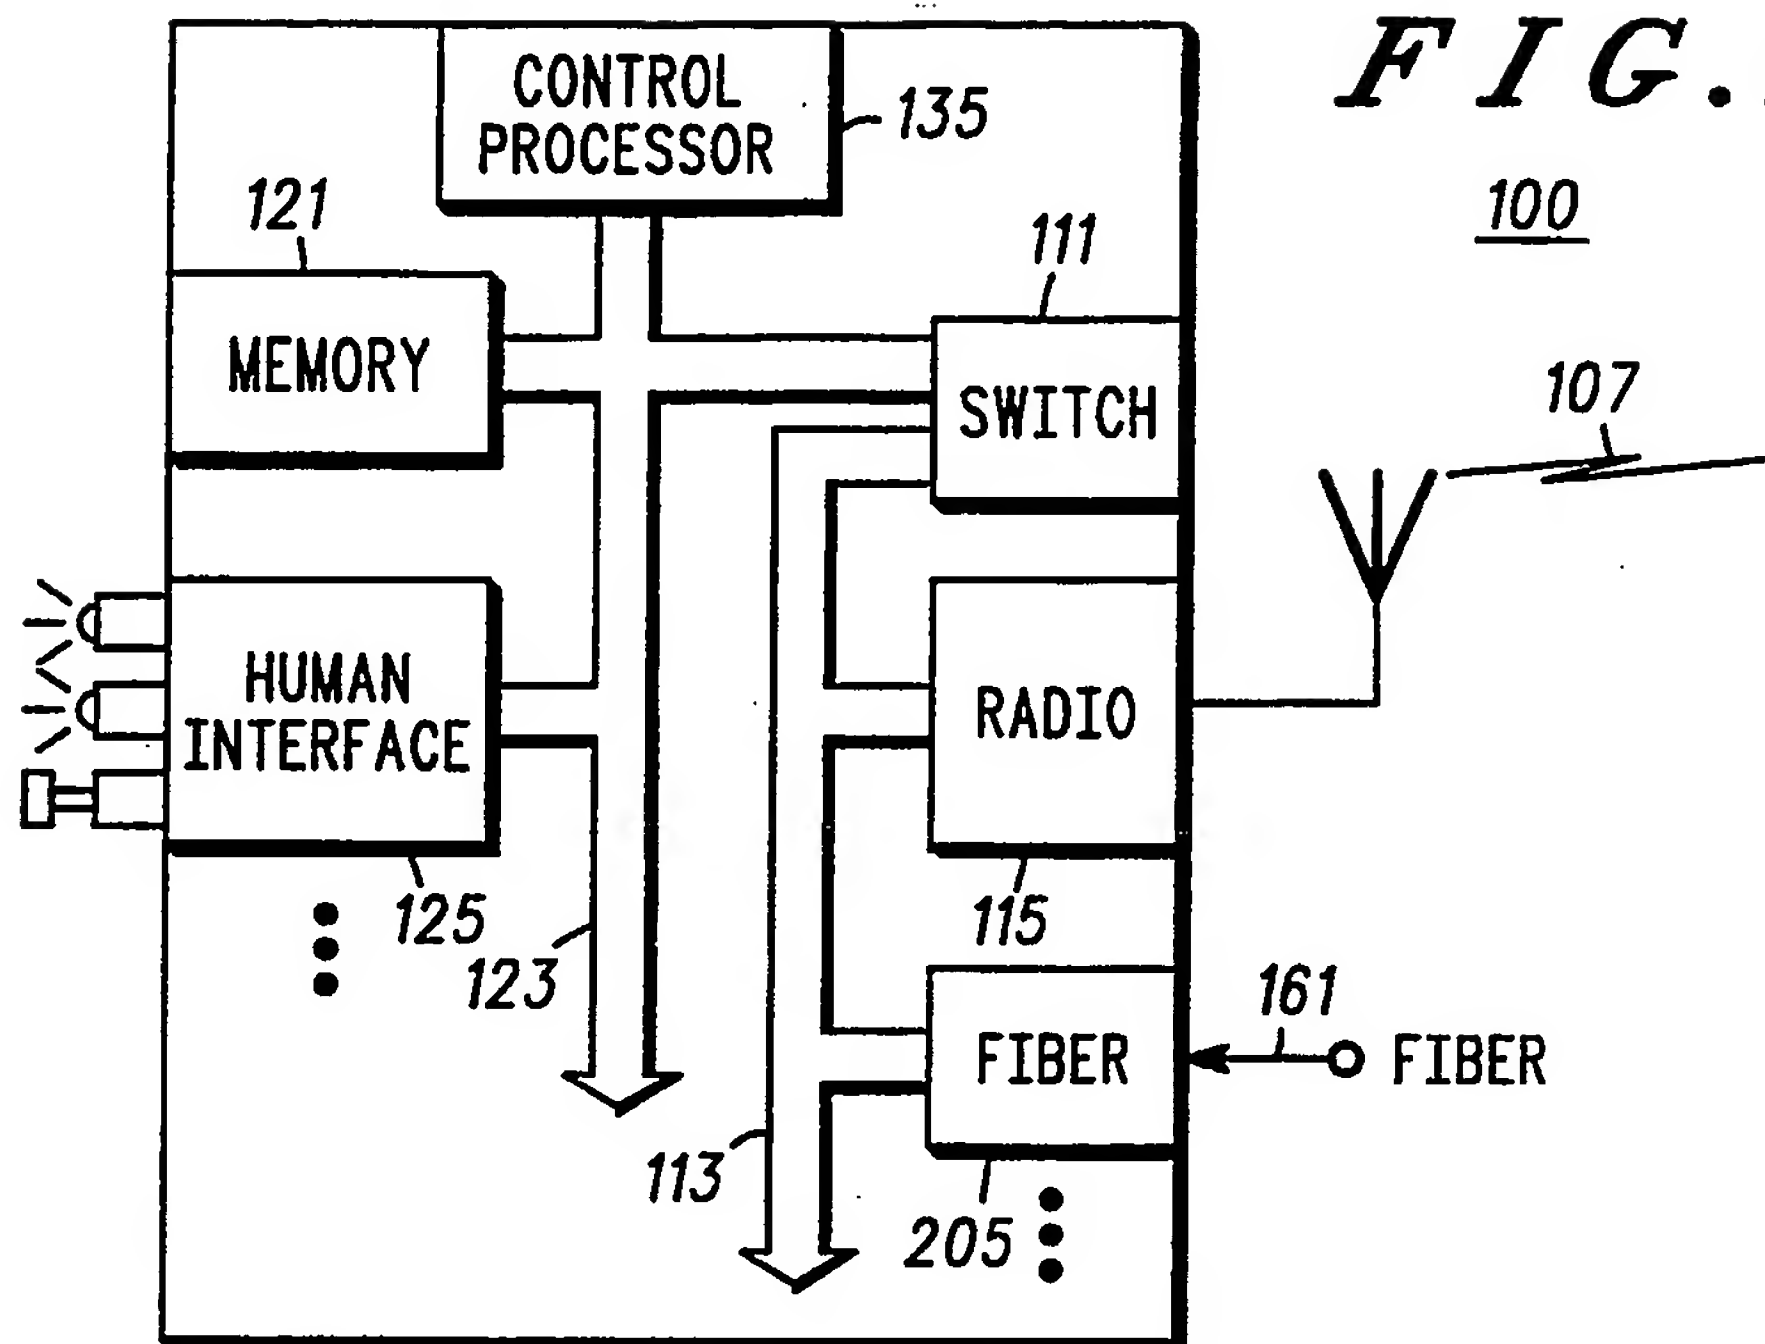

3 / 4

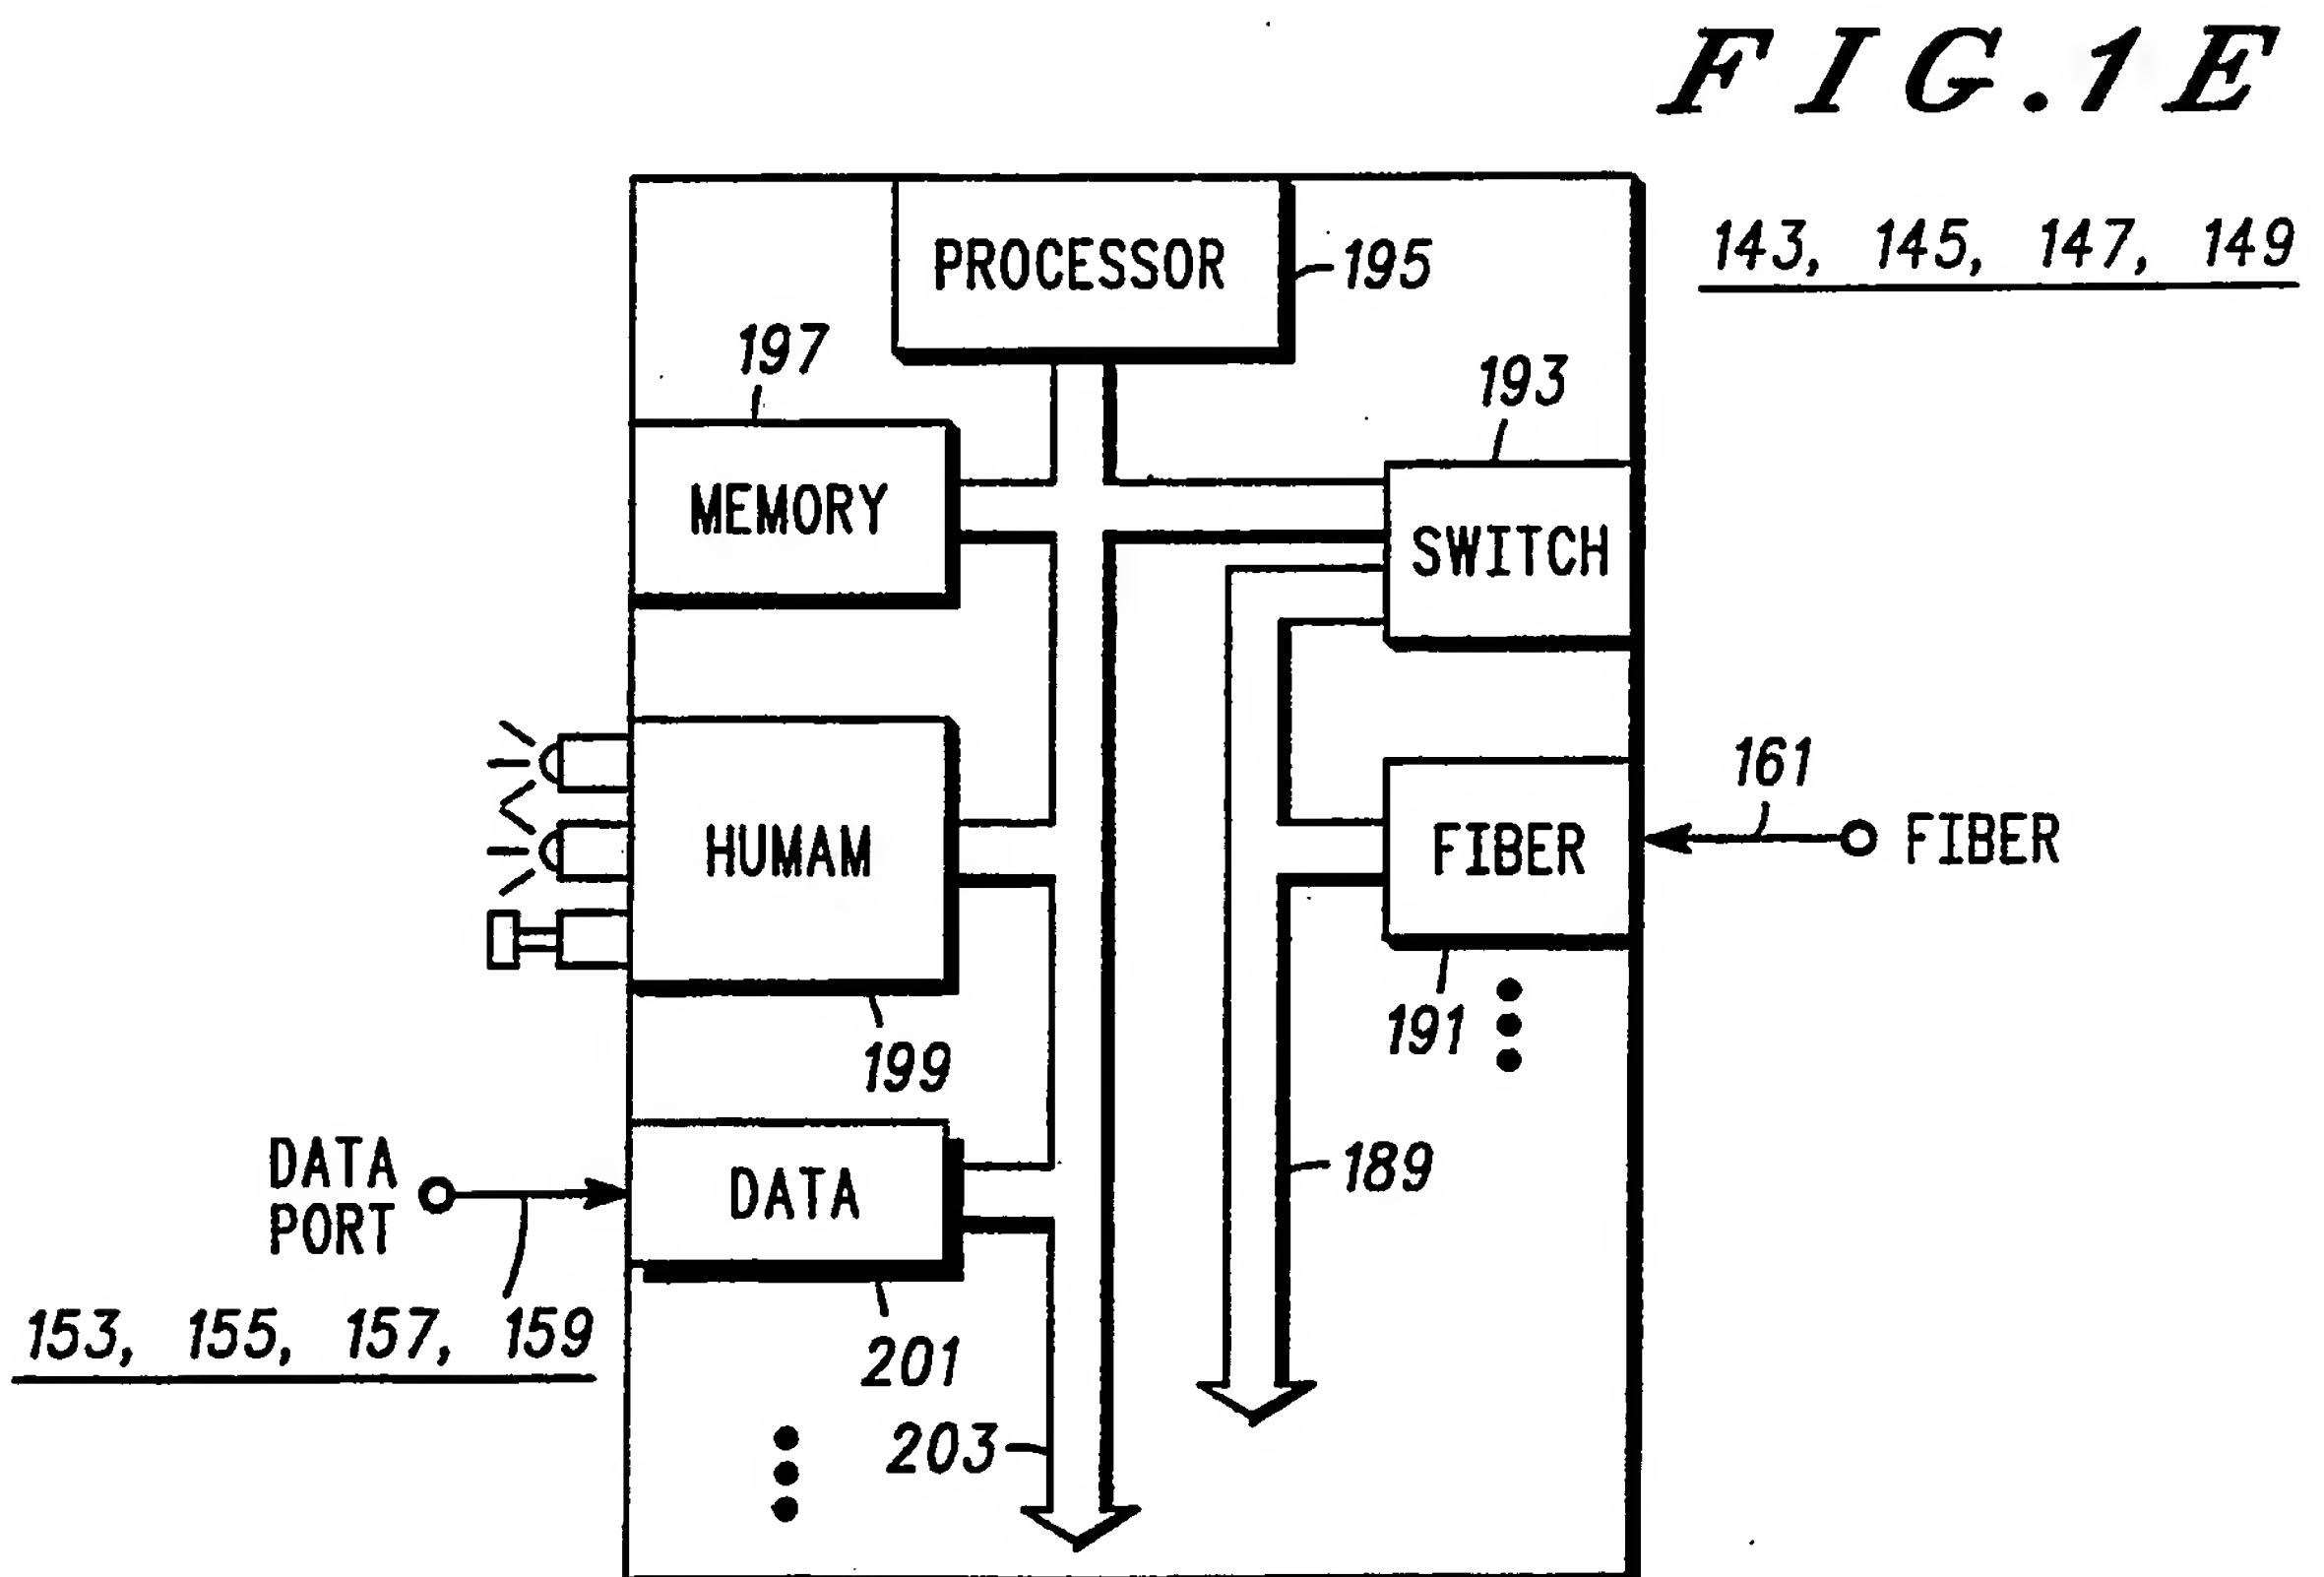
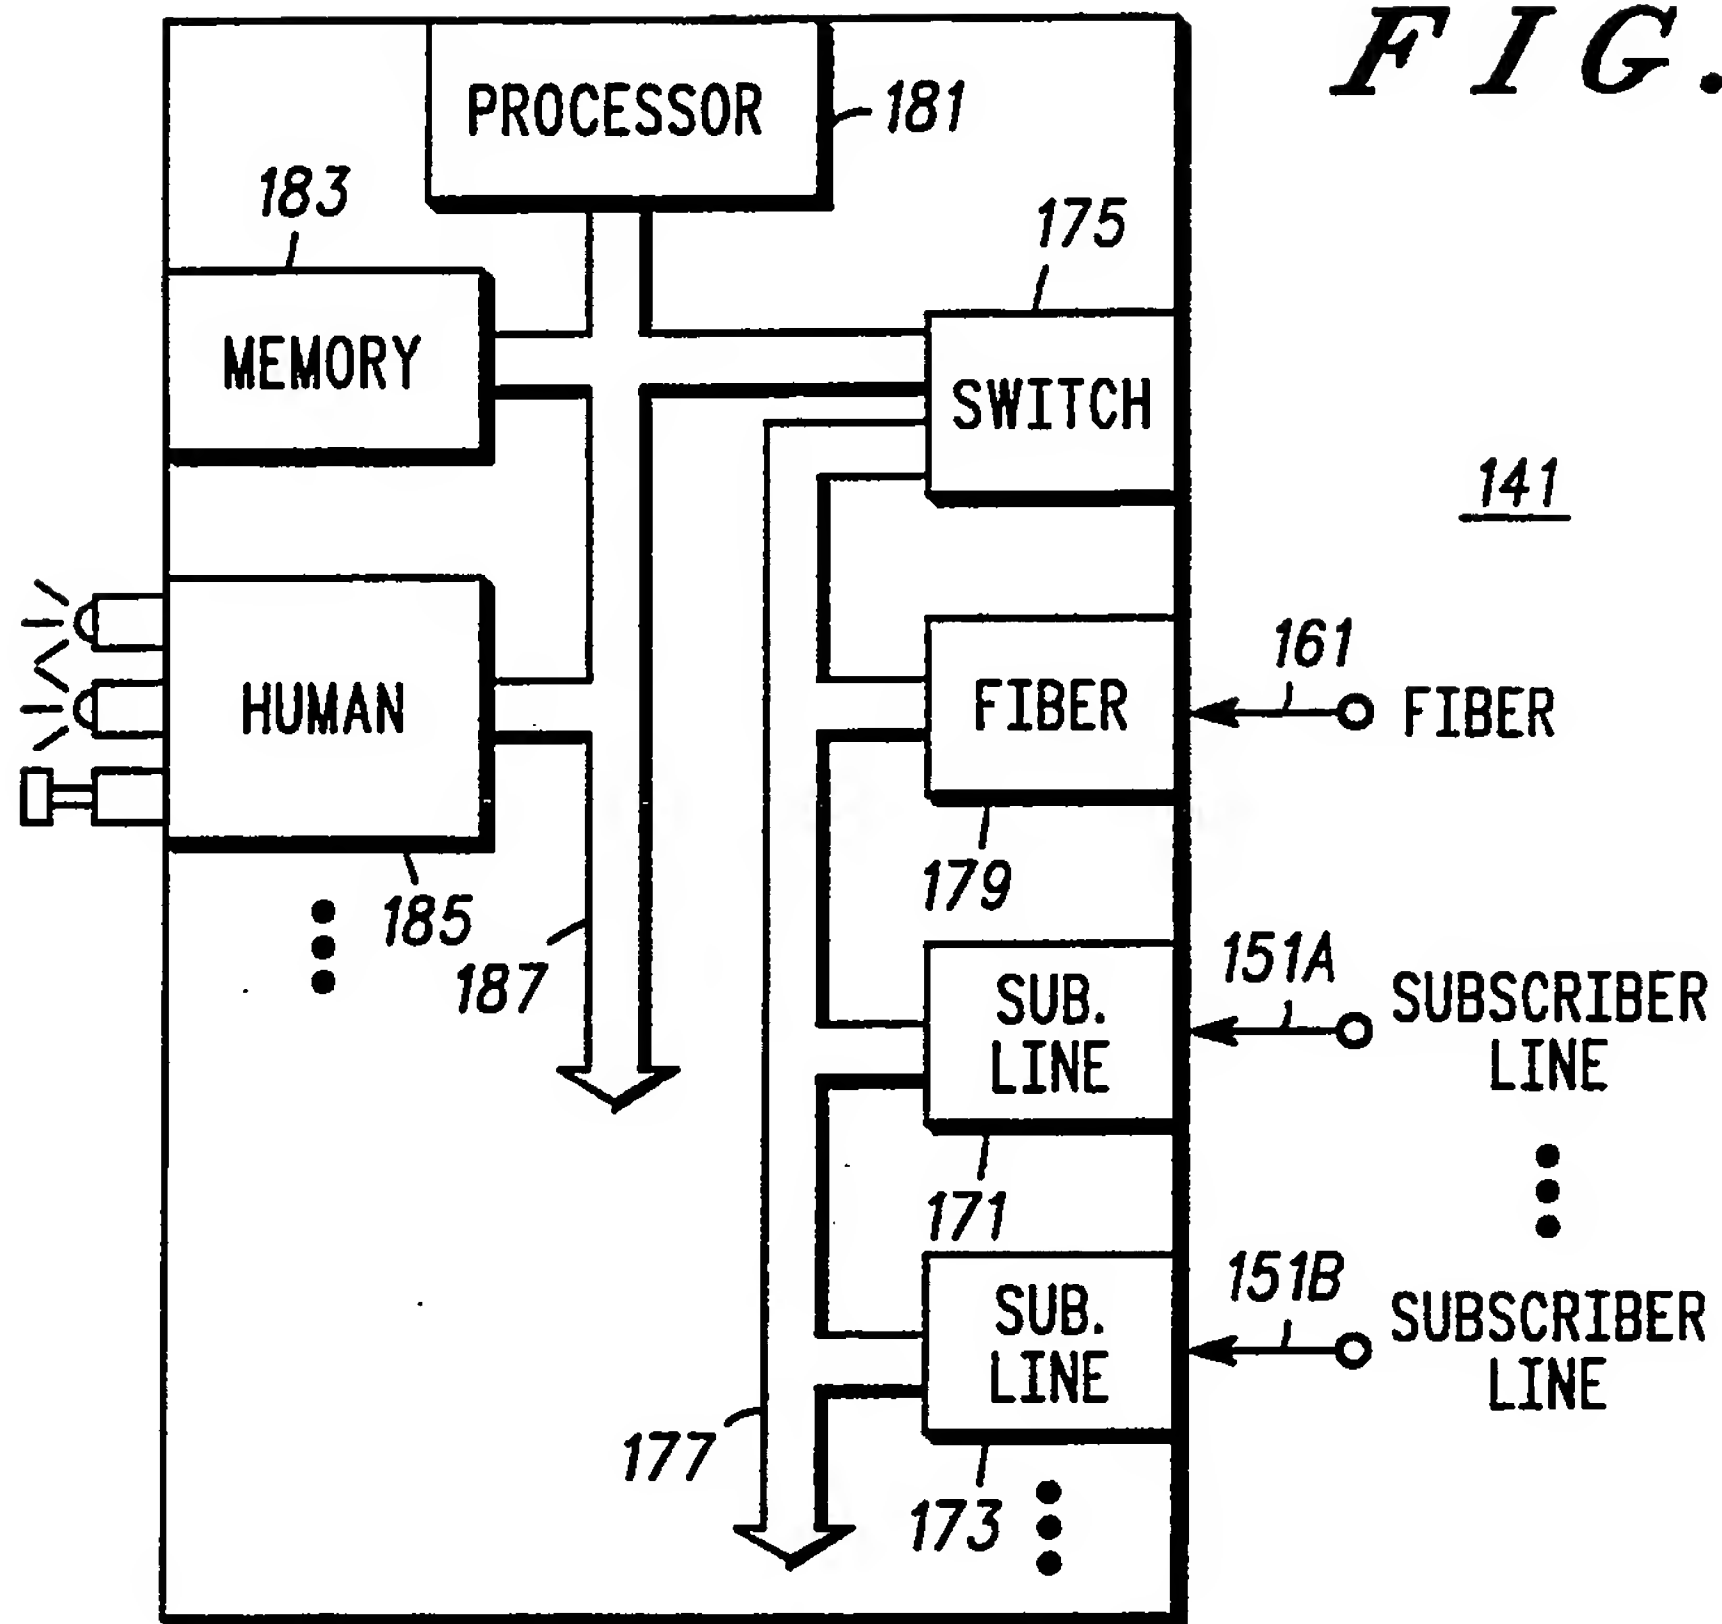


FIG. 4 400 4 / 4



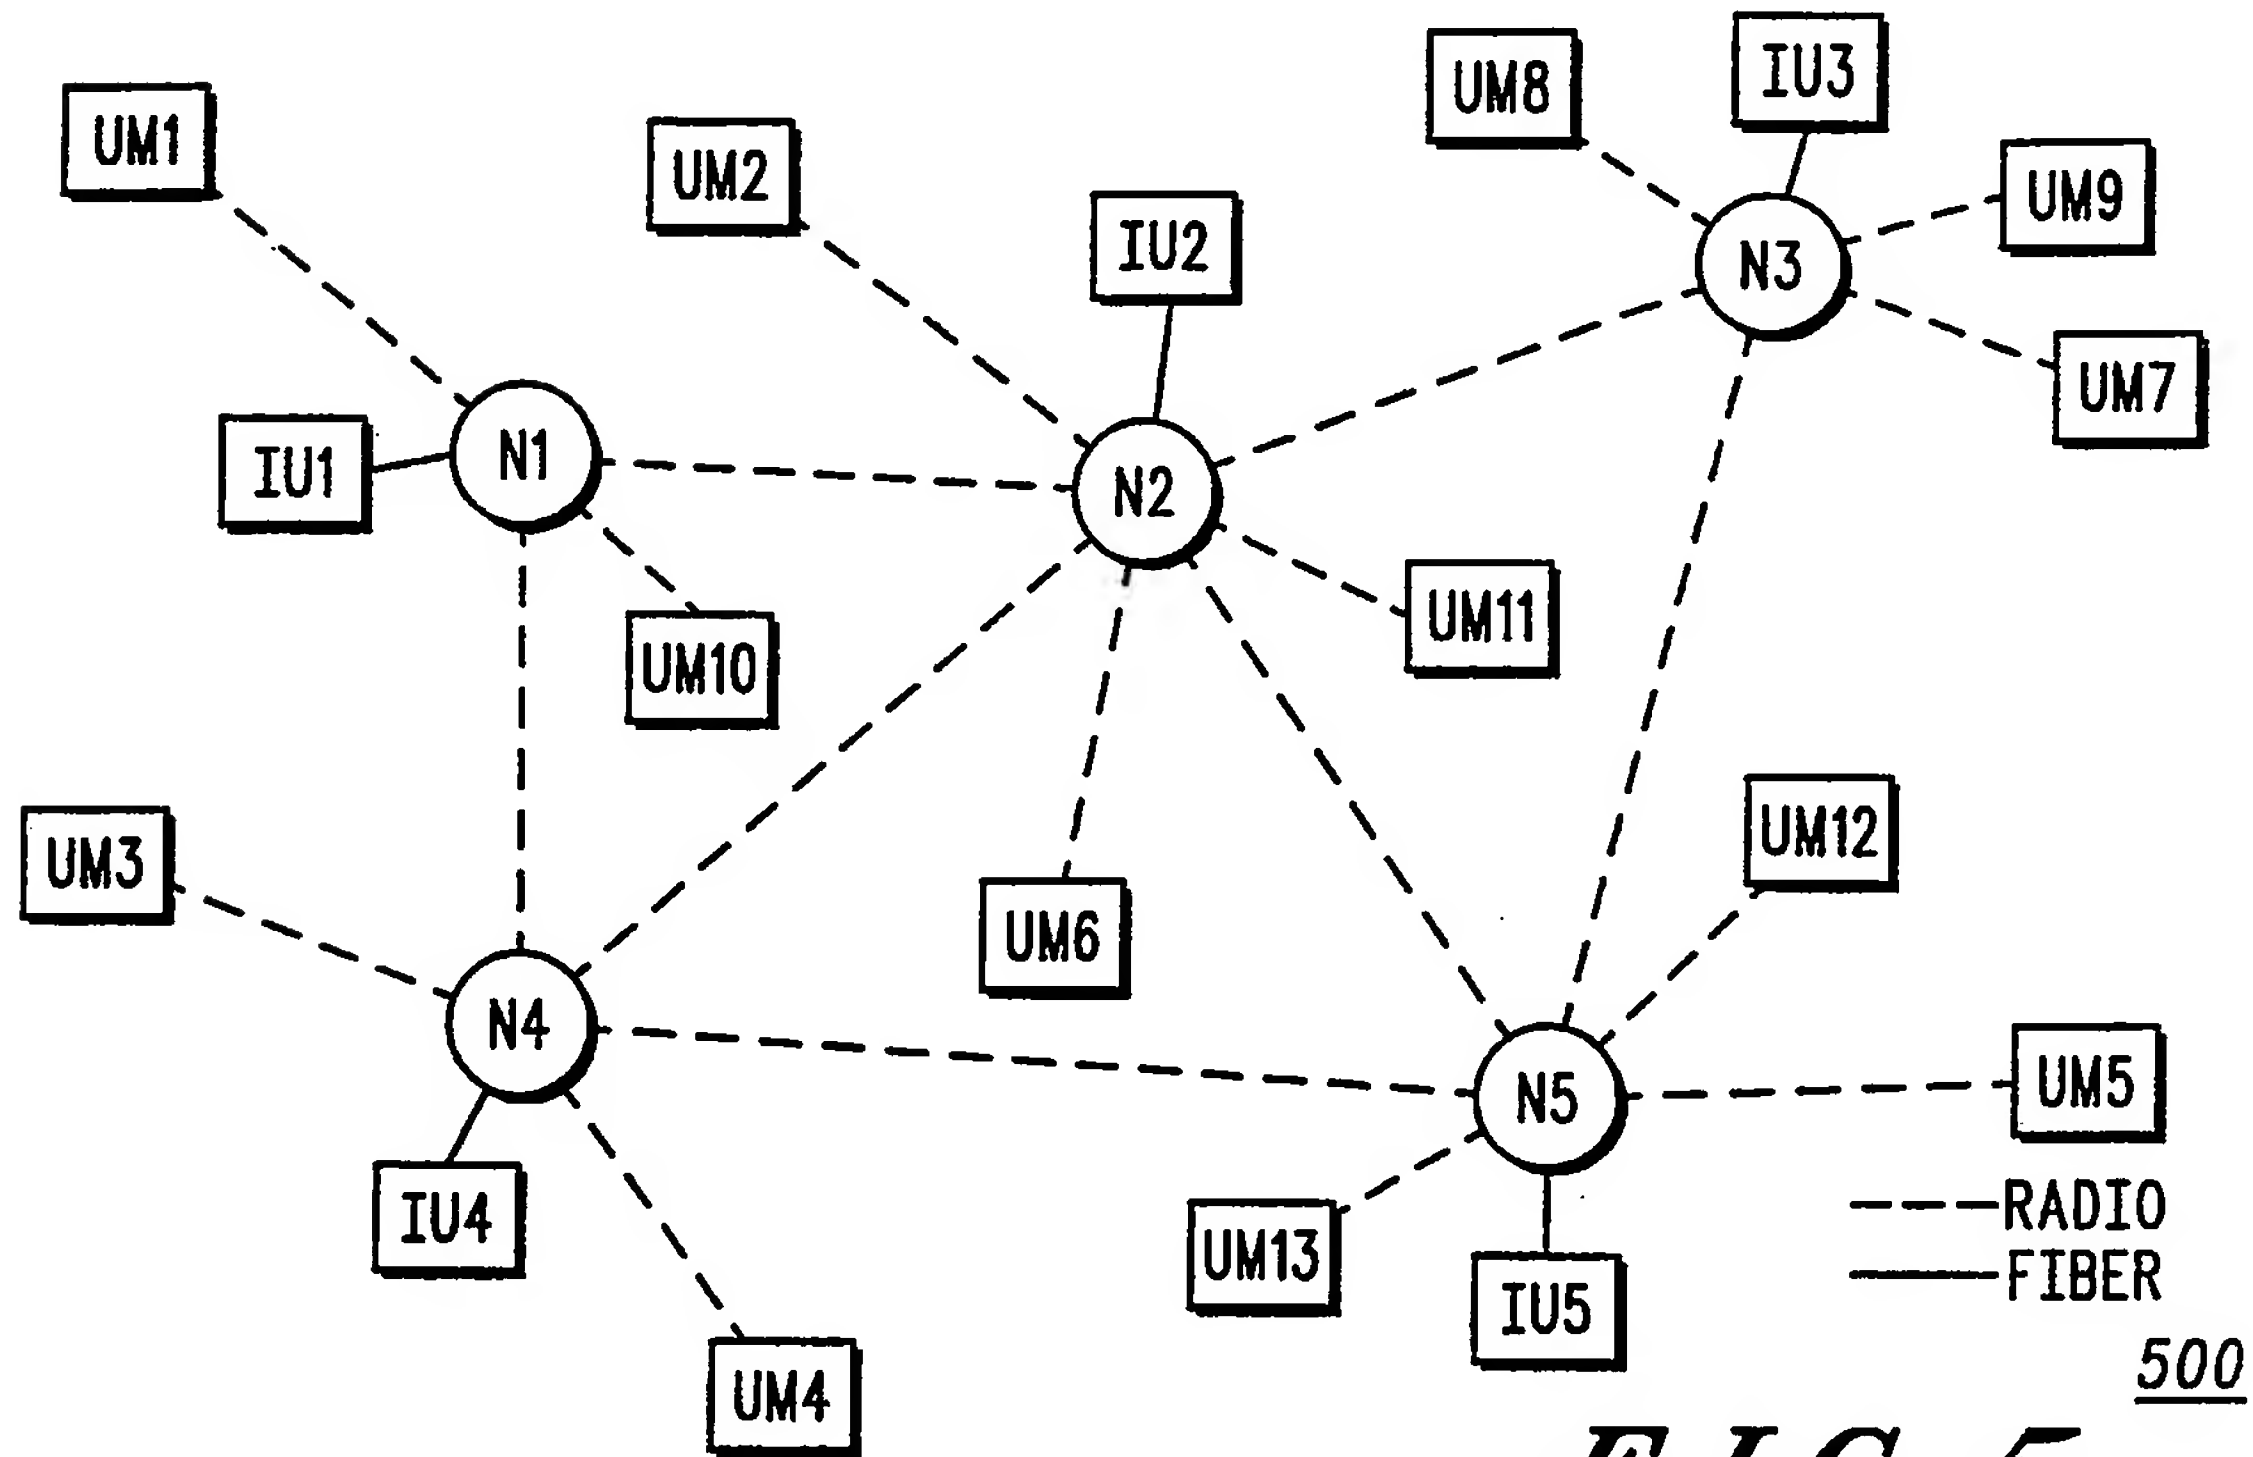



FIG. 5 500

FIG. 6

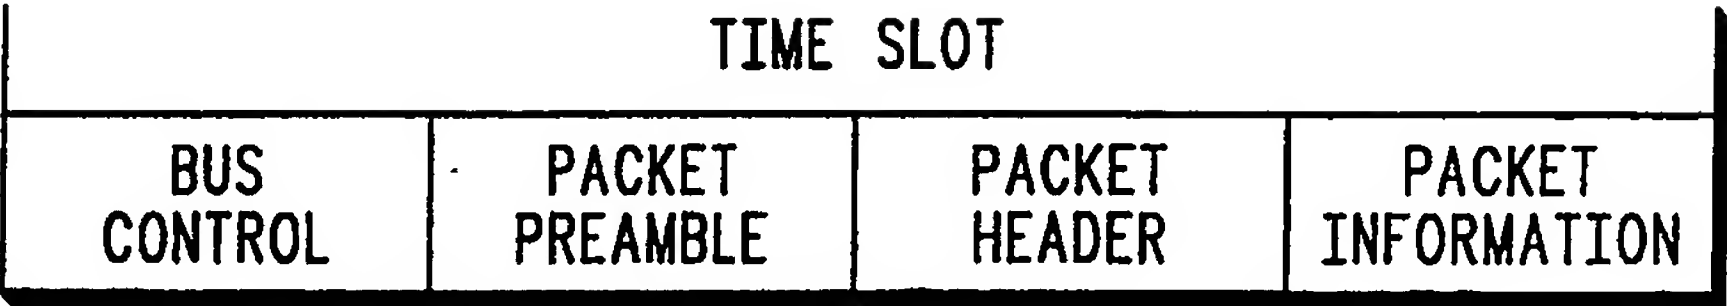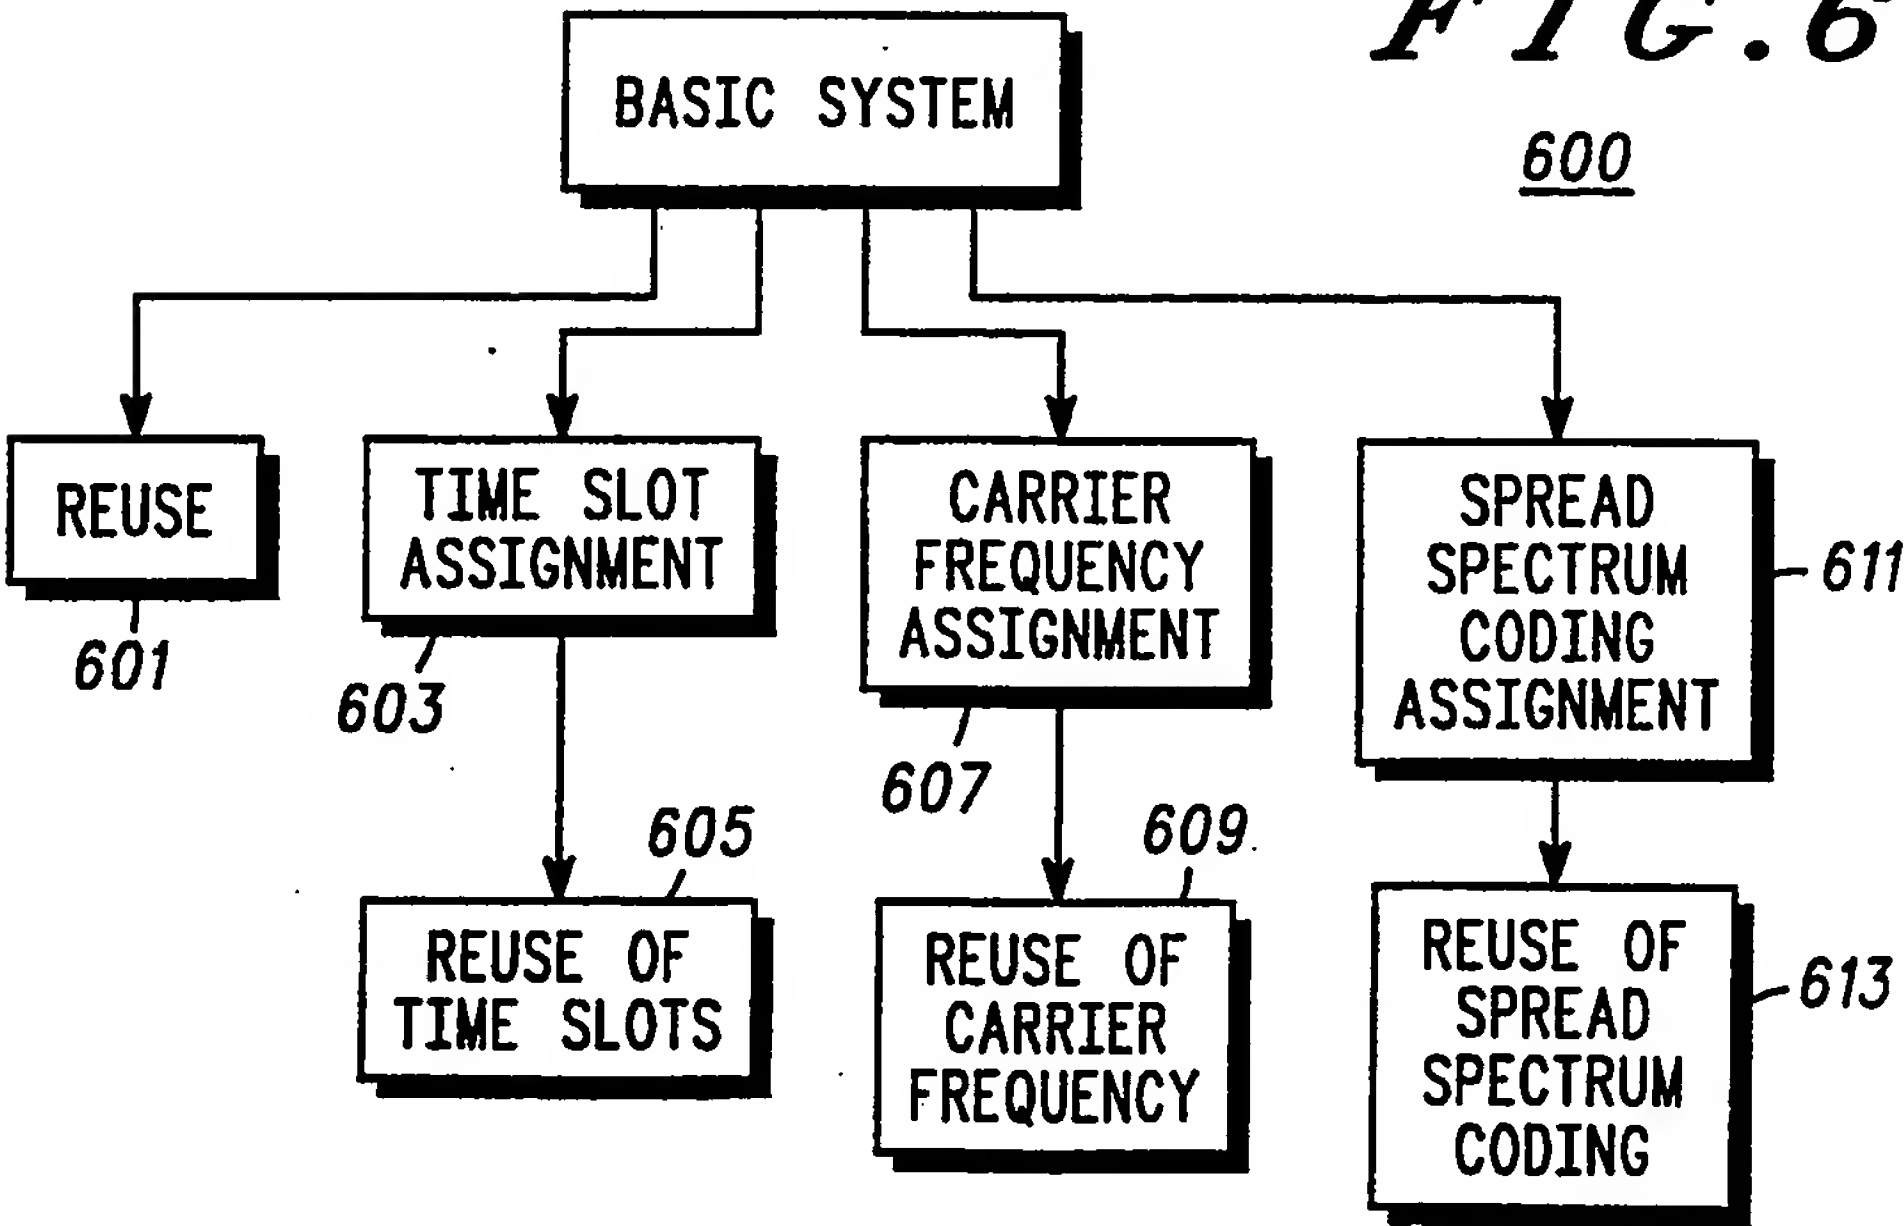

INTERNATIONAL SEARCH REPORT

International Application No PCT/US90/06905

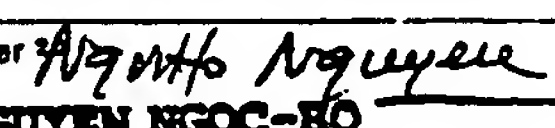I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ¹		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC(5): H04J 3/24; H04B 1/00		
US CL.: 370/094.100; 455/053		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
US	730/94.1, 94.3, 95.1, 95.3; 379/56, 58, 63, 94 455/49, 53, 55, 56, 57, 33	
Documentation Searched other than Minimum Documentation to the extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁴
Y	US, A, 4,789,983 (ACAMPORA et al.) 06 December 1988 See Fig. 1; column 2, lines 28-55; column 3, lines 1-19; column 4, lines 26-53.	1-9
Y	US, A, 4,672,601 (ABLAY) 09 June 1987 See Fig. 1, elements 110, 112.	1,3-9
Y	US, A, 4,870,601 (ZDUNEK et al.) 26 September 1989 See Fig. 1, elements 106, 112, 114, 116, column 3, lines 34-59.	2,4-5,7-9
A	US, A, 4,398,289 (SCHOUTE) See entire document.	1-9
<p>¹⁵ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ²	Date of Mailing of this International Search Report ³	
16 JANUARY 1991	20 FEB 1991	
International Searching Authority ¹	Signature of Authorized Officer ¹⁸	
ISA/US	 HASSAN KIZOU NGUYEN NGOC-HO INTERNATIONAL DIVISION	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.